

Prep/Master® 4430-RC

Project sizes up to 20,000 SF (2,000 m²)

 It's a System
Not a Machine

**4430RC 230V -
Item #418440230**

**4430RC 480V -
Item #418440480**



Flooring Applications



Concrete



Terrazzo



Marble



Granite


Specifications

Motor	25 HP - 3 phase (18.6kW)
Power Source	220/230 VAC 3 Phase, 50-60 Hz 380/480 VAC 3 Phase, 50-60Hz
Power Cord	30 ft. (9m) 6-4
Weight	2,050 lbs. (930 kg)
Tool RPM	250 - 750 RPM Variable
Number of Tools	24
Tools Attachment Style	EG Proprietary Attachment System
Dimensions	97"L x 44"W x 64"H 246 x 112 x 163 cm
Vacuum Hose Connection	3 in. (75 mm)
Recommended Vacuum	Prep/Master® 3003GP (317CFM) or equivalent

Production Rates

Mastic Removal	725 SF (70 m ²) per hr
Thin Set Removal	725 SF (70 m ²) per hr
+/-25 mil Coatings	575 SF (60 m ²) per hr
Polished Concrete	5,025 SF (500 m ²) per hr

Diamond Systems for STI-4430RC

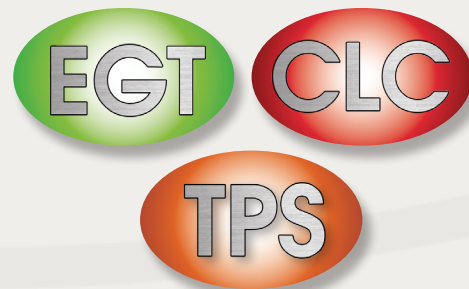

Service • Support • Success

Substrate Technology, Inc.
1384 Bungalow Rd.
Morris, Illinois 60450

+1.815.941.4800
Fax +1.815.941.4600
www.SubstrateTechnology.com