



STANDARD SPECIFICATIONS

R291PRO

- Three Motor - 120/1/60, 290 CFM, 3.2 Hp and 75" H2O
- HEPA 2.0 Secondary Filter - 99.97% Efficient @ 0.3 Microns
- Compression Cast Composite Modular Housing
- External Filter Cleaning Mechanism - Dustless Cleaning of Filter
- 13 sq. ft. MicroClean Filter - 99% Efficient @ 0.5 Microns
- 2" Vacuum Inlet with Aluminum Cast Deflector
- Intermittent Duty Operation
- 9-Gallon Collection Capacity - Removable Dustpan
- Silencer kit for Extremely Quiet Operation
- Use up to 50' of Hose



R291PRO

RED RAIDER 120 PRO

OSHA COMPLIANCE TABLE



- Up to 7" handgrinders, tuck pointers, and handheld crack chasers
- 10" scarifiers
- 8" shotblasters
- Up to 28" walk behind floor grinders
- Joint cleanout saws
- Up to 8" handheld power saws for fiber board
- Dowel drilling rigs
- Medium platform surface preparation equipment



ruwac.com

R291PRO

DIMENSIONAL DRAWINGS

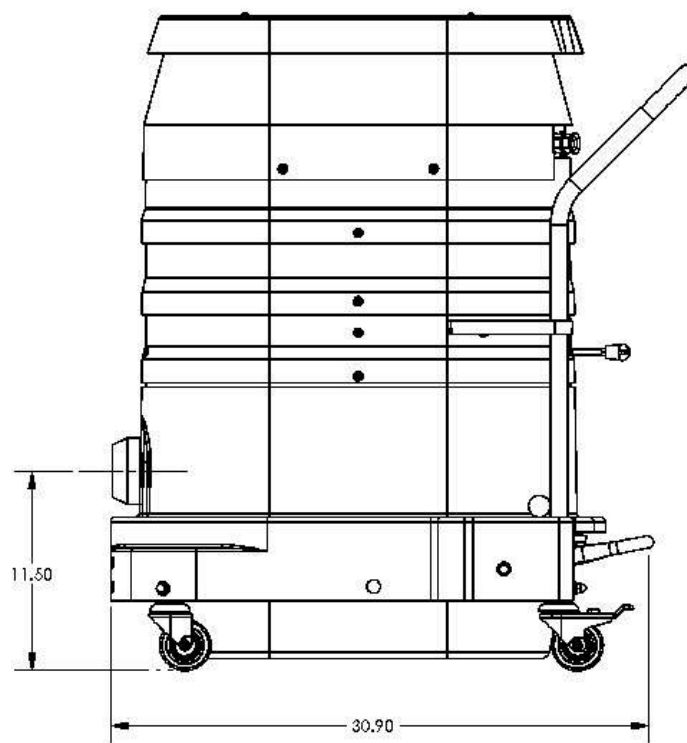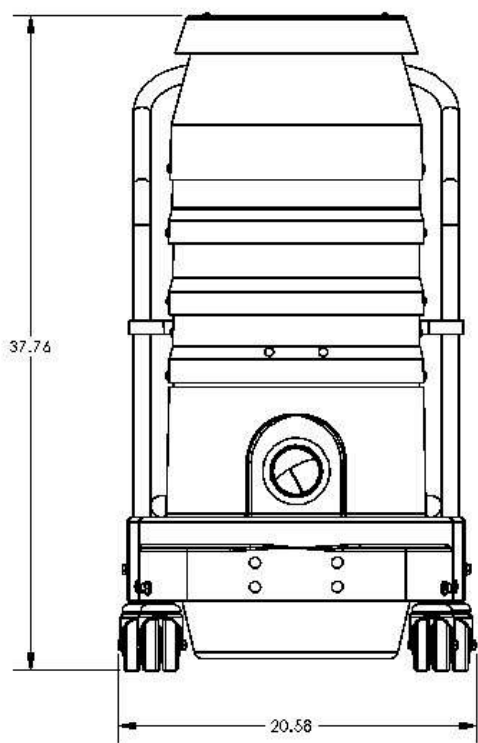

R291PRO

RED RAIDER 120 PRO